



# Leviat®

## Ancon® LinkPro Lifting Loops

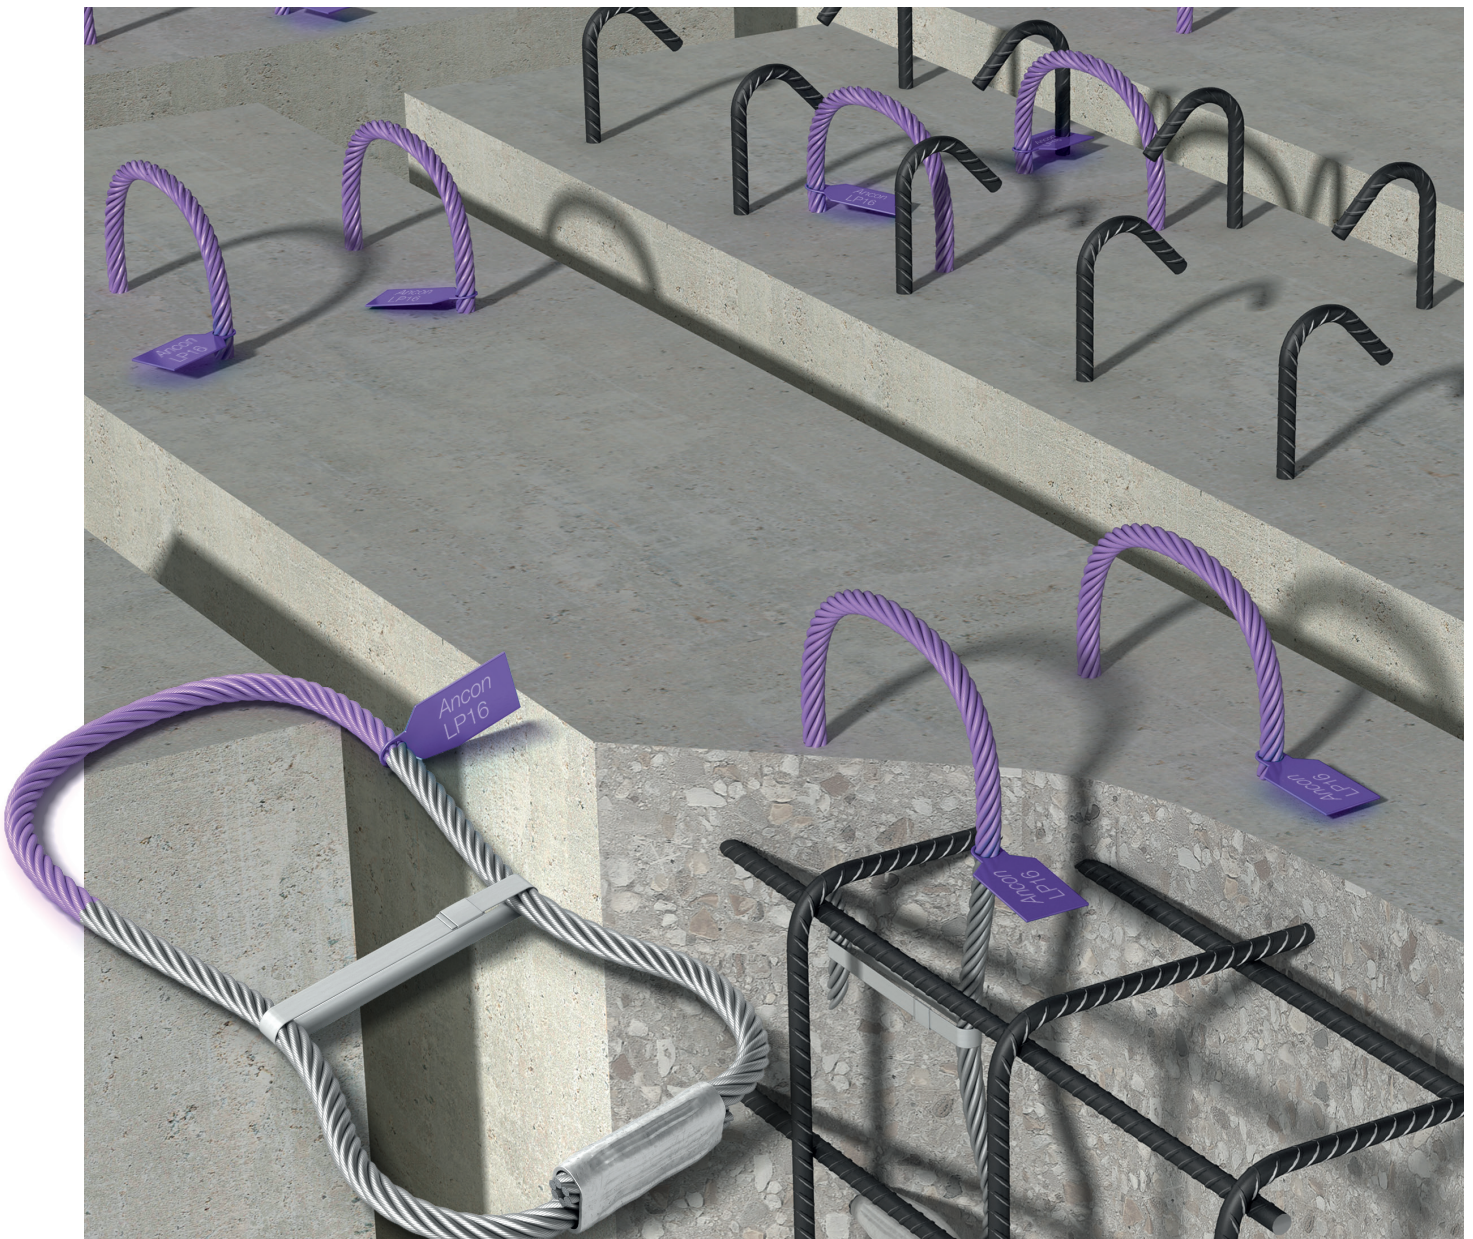

Lifting & Bracing  
Precast Lifting

Imagine. Model. Make.



# Leviat

We imagine, model and make engineered products and innovative construction solutions that help turn architectural visions into reality and enable our construction partners to build better, safer, stronger and faster.

**Leviat is a world leader in connecting, fixing, lifting and anchoring technology.**


From the build of new schools, hospitals, homes and infrastructure, to the repair and maintenance of heritage structures, our engineering skills are making a difference around the world.

We provide technical design assistance at every stage of a project, from initial planning to installation and beyond.

Our technical support services range from simple product selection through to the development of a fully customised project-specific design solution.

Every promise we make locally, has the commitment and dedication of our global team behind it. We employ almost 3,000 people at 60 locations across North America, Europe and Asia-Pacific, providing an agile and responsive service worldwide.




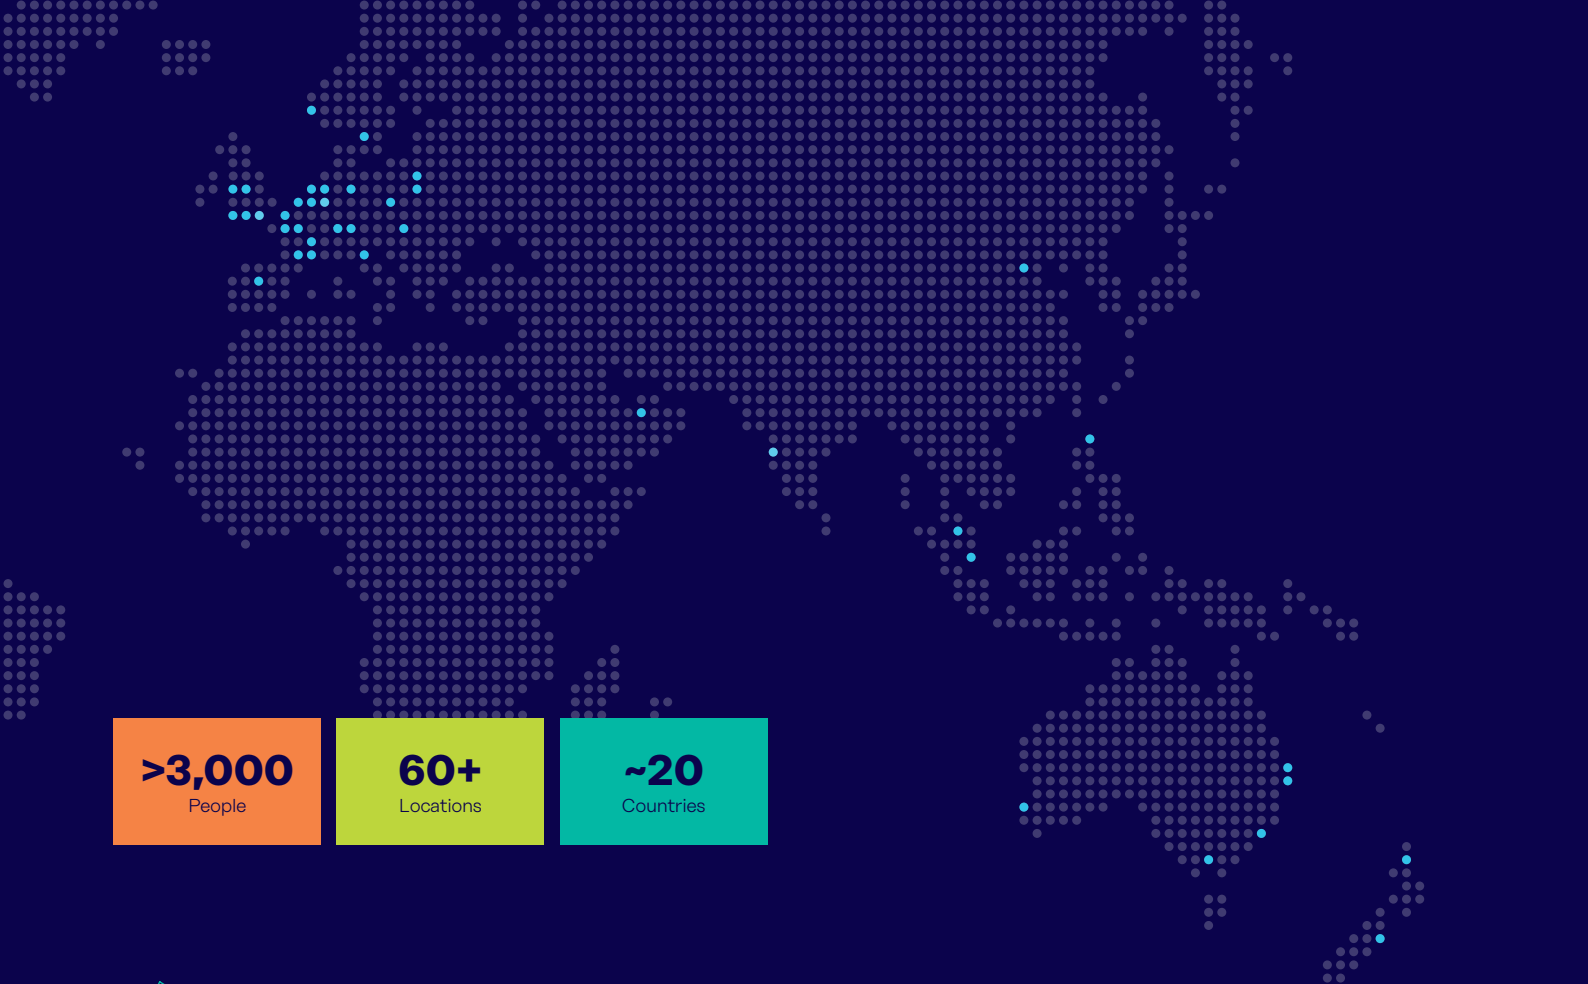

**>3,000**  
People

**60+**  
Locations

**~20**  
Countries




### Lifting & Bracing

Systems for the safe and efficient transportation, lifting and temporary bracing of cast concrete elements and tilt-up panels before permanent structural connections are made.

- Precast Lifting
- Tiltup Lifting
- Bracing & Anchorage

### Other areas of expertise:




#### Structural Connections

Systems to form robust, efficient connections, and continuity of concrete reinforcement as necessary, between walls, slabs, columns, beams and balconies, providing structural integrity as well as enhanced thermal and acoustic performance.



#### Façade Support & Restraint

Systems for the safe and thermally-efficient fixing of the external building envelope, including brick and natural stone, insulated sandwich panels, curtain walling and suspended concrete façades, and also the repair and strengthening of existing masonry installations.




#### Anchoring & Fixing

Systems for fixing secondary fixtures to concrete, including anchor channels, bolts and inserts; also tension rod systems for roofs and canopies.



#### Formwork & Site Accessories

Non-structural accessories that complement our engineered solutions and help keep your construction environment operating safely and efficiently, including moulds for casting standard and special concrete elements and construction essentials such as reinforcing bar spacers.



#### Industrial Technology

Mounting channels, pipe clamps and other versatile framing systems that provide safe fixing in a wide range of industrial applications.

### Leviat product ranges:


Ancon | Aschwanden | Connolly | Halfen | Helifix | Isedio | Meadow Burke | Modersohn | Moment | Plaka | Scaldex | Thermomass

# Ancon LinkPro Lifting Loops

Ancon LinkPro fibre-cored/steel-cored lifting loops help to facilitate the safe and efficient handling of precast and prestressed reinforced concrete units, including bridge and shell beams

The Ancon LinkPro Lifting Loop system consists of a range of loops in 12 load classes with working loads reaching from 10t - 65t.

Each Ancon LinkPro loop is manufactured from galvanized, high strength, 1770MPa grade fibre-cored/steel-cored steel wire rope, joined with a swaged ferrule and fitted with a colour-coded tag detailing the product code, working load limit (WLL) and batch number. A colour-coded painted section, designed to be left exposed after installation, provides a visual check that the correct embedment depth has been achieved.

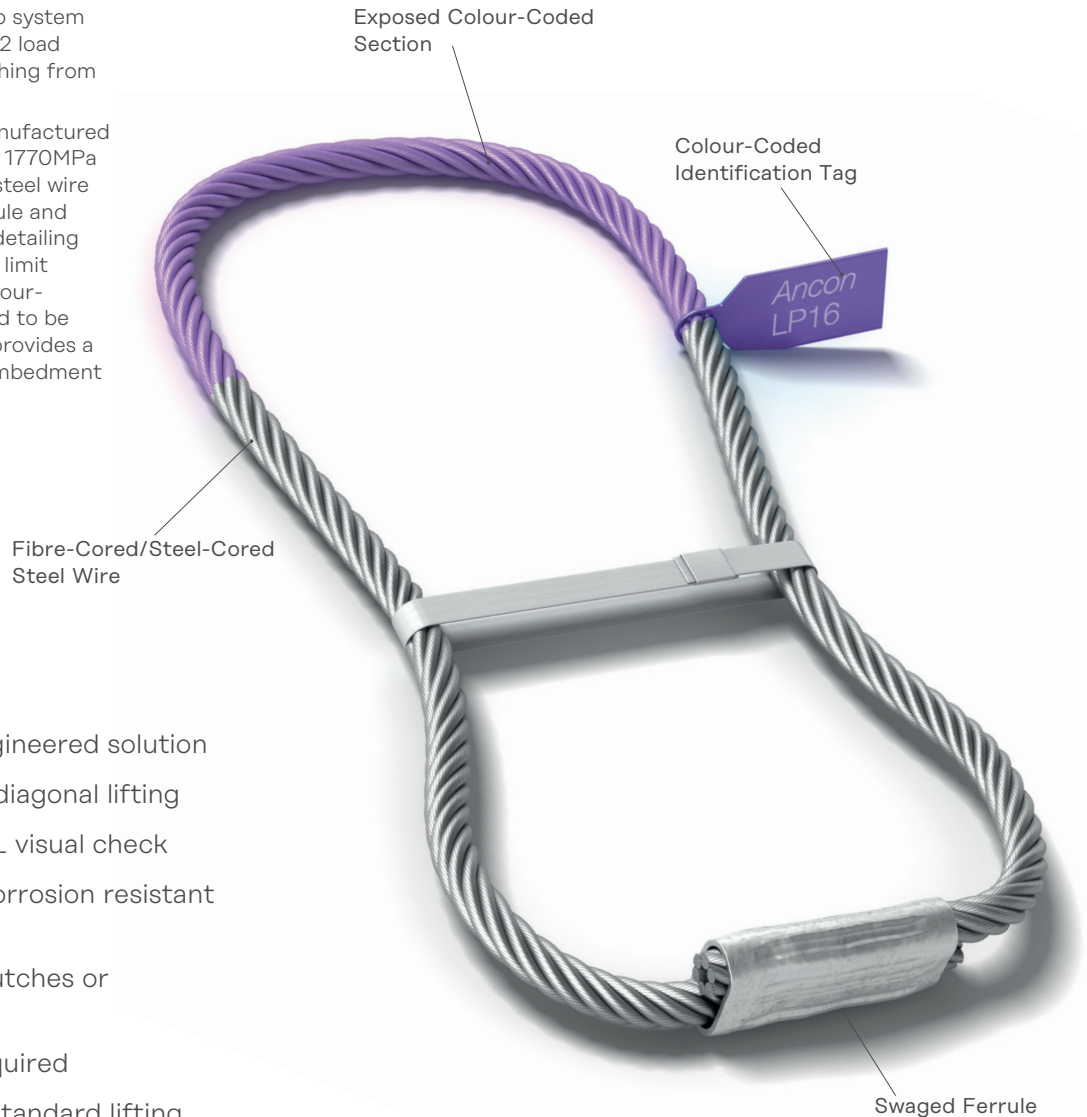

- ✓ Safe, reliable, fully engineered solution
- ✓ Suitable for axial and diagonal lifting
- ✓ Colour-coded for WLL visual check
- ✓ Manufactured from corrosion resistant galvanised steel
- ✓ No specialist lifting clutches or equipment required
- ✓ No recess formers required
- ✓ Suitable for use with standard lifting hooks/shackles
- ✓ Thimbles available for applications, where standard lifting equipment does not meet requirements



### Design Considerations

Ancon LinkPro applications should be engineered to meet the requirements of relevant standards, e.g. AS 3600, AS 3850 for building elements, AS 5100 for bridge elements and TMR MRTS73 for prestressed concrete members, taking into consideration the rigging, element dimensions, weight, concrete strength, reinforcing etc.

### System Benefits

Ancon LinkPro provides a safe, reliable, fully engineered solution for the handling of large precast concrete units used in the civil engineering sector. Ancon LinkPro is easily installed, without recess formers, ready for direct connection to standard lifting hooks and shackles.

Ancon LinkPro Lifting Loops are suitable for axial and diagonal lifting, with a maximum sling angle of  $60^\circ$  at the hook (maximum  $30^\circ$  to the vertical line), from manufacture until final installation of the precast concrete element.

The multi-stranded, fibre-cored/steel-cored construction of Ancon LinkPro features small diameter outer wires (see table for details), which generate low bending stresses when loaded.

When shackle pins are used in high load designed applications, we recommend a diameter not less than 3.5 times the rope diameter  $d$ , see page 9 for further information.

For further information, please contact the Leviat Technical Team for engineered lifting design guidance.




© Supertee Beam - M2PP Alliance

# Ancon LinkPro Lifting Loops

## Ancon LinkPro Range, Colour Codes and Dimensions

The Table below shows the dimensions of the Ancon LinkPro Lifting Loops.

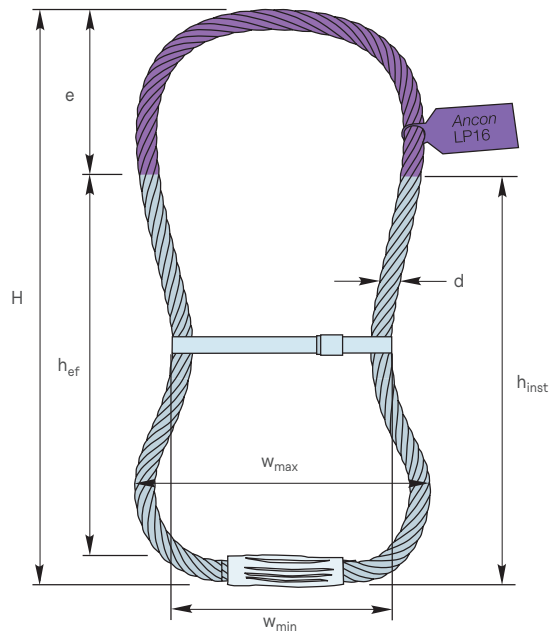

| Part Number | Tag Colour Code | Rope Diameter $d$ (mm) | Overall Height $H$ (mm) | Embedment Depth $h_{ef}$ (mm) | Installation Depth $h_{inst}$ (mm) | Exposed Insert Height $e$ (mm) | Min. Width ( $W_{min}$ ) (mm) | Max. Width ( $W_{max}$ ) (mm) | Approx. Weight (kg) |
|-------------|-----------------|------------------------|-------------------------|-------------------------------|------------------------------------|--------------------------------|-------------------------------|-------------------------------|---------------------|
| LP10        | Pink            | 20                     | 525                     | 370                           | 390                                | 135                            | 185                           | 255                           | 2.4                 |
| LP12        | Yellow          | 22                     | 590                     | 413                           | 435                                | 155                            | 200                           | 285                           | 3.5                 |
| LP16        | Lilac           | 24                     | 670                     | 465                           | 490                                | 180                            | 260                           | 330                           | 4.5                 |
| LP20        | Ochre           | 28                     | 750                     | 518                           | 545                                | 205                            | 280                           | 345                           | 6.8                 |
| LP25        | Brown           | 32                     | 850                     | 583                           | 615                                | 235                            | 300                           | 400                           | 9.8                 |
| LP32        | Black           | 36                     | 870                     | 615                           | 650                                | 220                            | 310                           | 425                           | 12.9                |
| LP37        | Bright Orange   | 40                     | 950                     | 650                           | 690                                | 260                            | 340                           | 470                           | 17.5                |
| LP42        | Bright Orange   | 44                     | 1000                    | 675                           | 720                                | 280                            | 350                           | 545                           | 22.2                |
| LP47        | Bright Orange   | 44                     | 1100                    | 723                           | 770                                | 330                            | 390                           | 545                           | 24.3                |
| LP52        | Bright Orange   | 48                     | 1200                    | 815                           | 870                                | 330                            | 420                           | 580                           | 31.5                |
| LP57        | Bright Orange   | 48                     | 1350                    | 915                           | 970                                | 380                            | 480                           | 590                           | 35.4                |
| LP65        | Bright Orange   | 50                     | 1430                    | 975                           | 1030                               | 400                            | 590                           | 690                           | 43.9                |
| LP75        | Bright Orange   | 52                     | 1530                    | 1010                          | 1070                               | 460                            | 625                           | 725                           | 50.3                |

## Ancon LinkPro Working Load Limits

The Ancon LinkPro Lifting Loop design includes a factor of safety of 3.0, which exceeds the requirements of AS 3850.

Ancon LinkPro Lifting Loops can also be used for applications that require a Factor of Safety (FoS) of 4.0.

The table on the left shows the Working Load Limits (WLL) for Ancon LinkPro Lifting Loops for factors of safety of 3.0 and 4.0.

| Part Number | WLL FoS=3 (t) | WLL FoS=4 (t) |
|-------------|---------------|---------------|
| LP10        | 10.0          | 7.5           |
| LP12        | 12.5          | 9.4           |
| LP16        | 16.0          | 12.0          |
| LP20        | 20.0          | 15.0          |
| LP25        | 25.0          | 18.8          |
| LP32        | 32.0          | 24.0          |
| LP37        | 37.0          | 27.8          |
| LP42        | 42.0          | 31.5          |
| LP47        | 47.0          | 35.3          |
| LP52        | 52.0          | 39.0          |
| LP57        | 57.0          | 42.8          |
| LP65        | 65.0          | 48.8          |
| LP75        | 75.0          | 56.2          |



## Concrete Capacity Design

Like all other lifting anchors the Ancon LinkPro Lifting Loops depend on the tension capacity of the surrounding concrete. When being exposed to tension they activate a cone of concrete. For unrestricted concrete cones with a width of at least 3 times  $h_{ef}$ , the tension capacity is calculated using the Concrete Capacity Design (CCD) Method as specified in Appendix B of AS 3850.1:2015:

$$N_{Rk,c}^0 = k_{cr} \sqrt{f_{lift}} \cdot h_{ef}^{1.5}$$

where

$k_{cr}$  = Factor relating to the condition of concrete  
13 – non cracked concrete  
10 – cracked concrete

$f_{lift}$  = characteristic compressive strength of the concrete at time of lift (MPa)  
 $h_{ef}$  = effective embedment depth of the insert (mm) – see table on page 6


Ancon LinkPro Lifting Loops are often used in slender concrete members, so that the full cone capacity cannot be activated.

The following table shows the minimum width of the concrete member and the required edge spacing that is required to achieve the required Working Load Limit of the Lifting Loop. The values are based on an end spacing  $c=1.5 \cdot h_{ef}$  and an anchor spacing  $s=3.0 \cdot h_{ef}$ , which means that the concrete cone is un-restricted in the longitudinal direction of the beam and only restricted in the direction perpendicular to the longitudinal direction.


## Minimum Precast Element Dimensions for lifting at 30MPa

| Part Number | End Distance c (mm) | Minimum Anchor Spacing S (mm) | Minimum Precast Element Width a,b (mm) |
|-------------|---------------------|-------------------------------|----------------------------------------|
| LP10        | 555                 | 1110                          | 720                                    |
| LP12        | 620                 | 1239                          | 816                                    |
| LP16        | 698                 | 1395                          | 1004                                   |
| LP20        | 777                 | 1554                          | 1176                                   |
| LP25        | 875                 | 1749                          | 1373                                   |
| LP32        | 923                 | 1845                          | 1652                                   |
| LP37        | 975                 | 1950                          | 1833                                   |
| LP42        | 1013                | 2025                          | 2009                                   |
| LP47        | 1085                | 2169                          | 2168                                   |
| LP52        | 1223                | 2445                          | 2300                                   |
| LP57        | 1373                | 2745                          | 2422                                   |
| LP65        | 1463                | 2925                          | 2655                                   |
| LP75        | 1515                | 3030                          | 2950                                   |

Longitudinal Installation

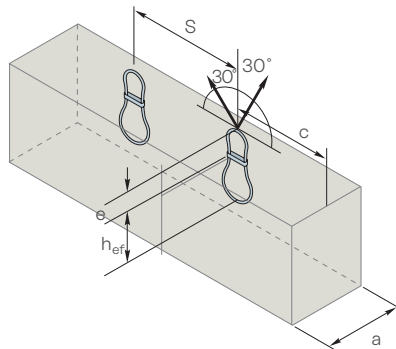

Transverse Installation

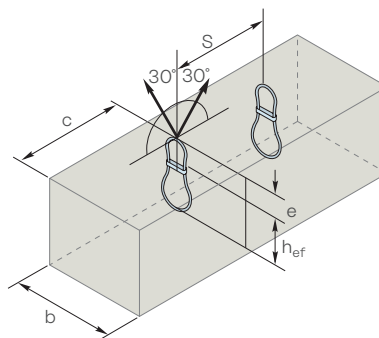

The dimensions in the table above are based on non-cracked concrete, the design relies on the concrete cone only, no effect from supplementary reinforcement is taken into consideration. For concrete members that do not allow the development of the required concrete cone, please refer to page 8 for recommendations on supplementary reinforcement.

# Ancon LinkPro Lifting Loops

## Design of Supplementary Reinforcement

In many cases the size of the concrete member is too small to allow for a sufficient concrete cone capacity. In these cases, a design of supplementary reinforcement according to EN 1992-4 – **Design of fastening for use in concrete** can be done utilising the existing shear reinforcement in the concrete member.


The reinforcement should be evenly distributed in the critical zone either side of a loop over the critical zone width  $z = 1.5 h_{ef}$ .

## Minimum Required Supplementary Reinforcement within Critical Zone


| Part Number | Critical Zone Width $z=1.5h_{ef}$ (mm) | Required Cross Section Reinforcement $A_{s,min}^*$ (mm <sup>2</sup> ) |
|-------------|----------------------------------------|-----------------------------------------------------------------------|
| LP10        | 555                                    | 545                                                                   |
| LP12        | 620                                    | 681                                                                   |
| LP16        | 698                                    | 872                                                                   |
| LP20        | 777                                    | 1090                                                                  |
| LP25        | 875                                    | 1363                                                                  |
| LP32        | 923                                    | 1744                                                                  |
| LP37        | 975                                    | 2017                                                                  |
| LP42        | 1013                                   | 2289                                                                  |
| LP47        | 1085                                   | 2562                                                                  |
| LP52        | 1223                                   | 2834                                                                  |
| LP57        | 1373                                   | 3107                                                                  |
| LP65        | 1463                                   | 3543                                                                  |
| LP75        | 1515                                   | 4088                                                                  |

\* All cross sections based on Grade 500N reinforcement bar in accordance with AS/NZS 4671

- The preferred shape for supplementary reinforcement is closed stirrups. Other types of bars like stirrups that are not closed in the first cast to work as a connection to a consecutive cast, might not be fully developed and might only be partially effective.
- The development length of reinforcement bars depends on the concrete strength at the time of lift. A concrete strength of 30MPa is recommended.

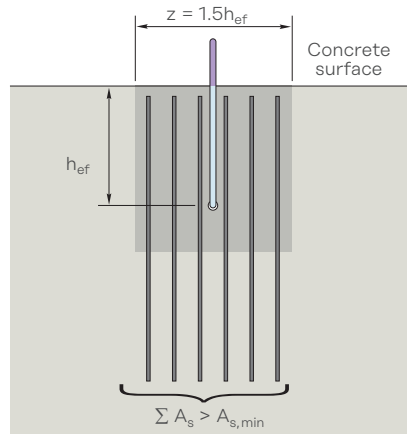

Reinforcement Details

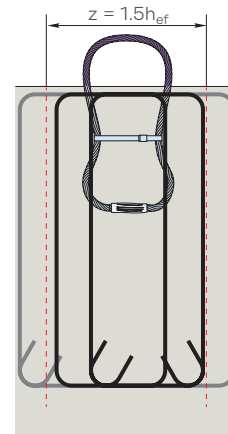

All reinforcement must be developed in the concrete member (below the concrete crack) and in the concrete cone (above the concrete crack formed by the anchor). The required cross section in the table above assumes that the supplementary reinforcement is fully developed. If the design shear reinforcing of the precast element  $A_s$  is less than  $A_{s,min}$  shown in the table, additional reinforcement e.g. hairpins, stirrups or hooked bars should be added to increase the area to  $A_{s,min}$ . The ties should be evenly and closely spaced around the Ancon LinkPro loop at approximately 50mm spacing while complying with bar spacing requirements of relevant design standards.

Reinforcement should be designed by the lifting design engineer, detailed on the shop drawings and placed in accordance with the approved lifting design. Where additional reinforcement is required, ensure it is not in contact with the swaged ferrule.

In the transverse installation, if any bars need to be cut to install the loop, they should be replaced by bars of the same size and lapped in accordance with the relevant design standard.

For applications which fall outside the scope of the table, please contact the Leviat Technical Team for design guidance.



# Installation, Lifting and Handling

## Pre-Installation

Store to avoid any damage to loops. Check Ancon LinkPro for defects prior to casting. Loops with evidence of mechanical damage, kinking, broken or unravelled wires, crushing, wear, corrosion or other serious damage should be discarded. If in doubt, contact Leviat.


## Installation

Carefully place Ancon LinkPro in its correctly measured position between the reinforcement, with the swaged ferrule at the bottom and the coloured section and WLL tag left exposed at the top. Tie to the reinforcement to minimise movement during casting. Ensure the swaged ferrule does not come into contact with the reinforcing bars or prestressing strand.

Ancon LinkPro should be placed and aligned either parallel (longitudinal installation) or perpendicular (transverse installation) to the direction of the expected load in accordance with the shop drawings, as approved by the lifting design engineer. The specified loop capacities, embedment depths, spacing and edge distances should be strictly adhered to. During installation, take care not to damage the exposed lifting section of the loops. When installing Ancon LinkPro ensure the band around the loop is not removed. For guidance, please contact Leviat's Technical Team.

## Notes

- Ensure that the rigging configuration does not result in a lever arm or bending moment during hook up
- When using crane hooks, Leviat recommends lifting with  $D/d = 3.5$ , where D is the hook diameter and d is the rope diameter of the Ancon LinkPro.






In addition, when lifting with large Ancon LinkPro sizes (LP20 and above) Leviat recommends lifting with Ancon LinkPro Thimbles so the correct radius is on the loop to ensure safe lifting

- Do not bend Ancon LinkPro to an angle greater than 30° during any lifting, handling or storage of the precast elements prior to the final installation of the precast element
- Where precast elements are to be stacked, sufficient separators must be used between the precast elements to prevent damage to Ancon LinkPro by bending beyond 30°, mechanical damage, crushing or abrasion
- After installation/use, the exposed loop may be cut off as required. Consideration should be given to corrosion protection of the cut ends if they are to remain exposed

## Leviat Thimbles for Ancon LinkPro Lifting Loops

| Part Number | D <sub>1</sub><br>(mm) | D <sub>2</sub><br>(mm) | D <sub>3</sub><br>(mm) | W<br>(mm) | OW<br>(mm) |
|-------------|------------------------|------------------------|------------------------|-----------|------------|
| LPT10-16    | 115                    | 60                     | 85                     | 35        | 45         |
| LPT20-25T   | 155                    | 85                     | 117                    | 45        | 52         |
| LPT20-37T   | 185                    | 100                    | 140                    | 50        | 65         |
| LPT42-57T   | 235                    | 135                    | 179                    | 70        | 95         |
| LPT65-75T   | 270                    | 160                    | 210                    | 75        | 95         |

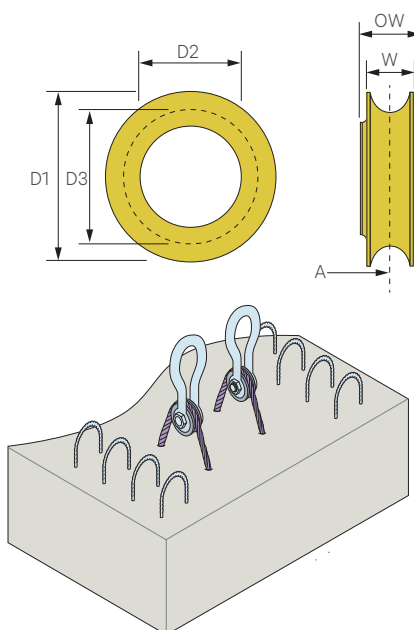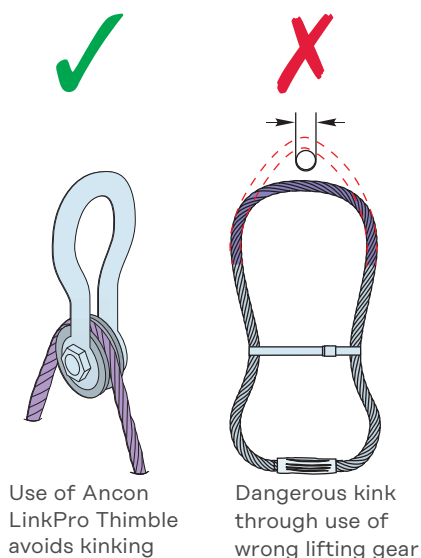

## Worldwide contacts for Leviat:

### Australia

Unit A, 1 Heinrich Close,  
Eastern Creek, Sydney, NSW 2766  
**Tel: +61 - 2 8808 3100**  
**Email: info.au@leviat.com**

### Austria

Leonard-Bernstein-Str. 10  
Saturn Tower, 1220 Wien  
**Tel: +43 - 1 - 259 6770**  
**Email: info.at@leviat.com**

### Belgium

Industrielaan 2  
1740 Ternat  
**Tel: +32 - 2 - 582 29 45**  
**Email: info.be@leviat.com**

### China

Room 601 Tower D,  
Vantone Centre  
No. A6 Chao Yang Men Wai Street  
Chaoyang District  
Beijing P.R. China 100020  
**Tel: +86 - 10 5907 3200**  
**Email: info.cn@leviat.com**

### Czech Republic

Pekařská 695/10a  
155 00 Praha 5  
**Tel: +420 - 311 - 690 060**  
**Email: info.cz@leviat.com**

### Finland

Vädursgatan 5  
412 50 Göteborg / Sweden  
**Tel: +358 (0)10 6338781**  
**Email: info.fi@leviat.com**

### France

6, Rue de Cabanis  
31240 L'Union  
**Tel: +33 (0)5 34 25 54 82**  
**Email: info.fr@leviat.com**

### Germany

Liebigstrasse 14  
40764 Langenfeld  
**Tel: +49 - 2173 - 970 - 0**  
**Email: info.de@leviat.com**

### India

Unit S4, 902, A Wing,  
Lodha iThink Techno Campus Building,  
Panchpakhadi, Pokharan Road 2,  
Thane, 400606  
**Tel: +91-022 695 33700**  
**Email: info.in@leviat.com**

### Italy

Via F.lli Bronzetti 28  
24124 Bergamo  
**Tel: +39 - 035 - 0760711**  
**Email: info.it@leviat.com**

### Malaysia

28 Jalan Anggerik Mokara 31/59  
Kota Kemuning,  
40460 Shah Alam Selangor  
**Tel: +603 - 5122 4182**  
**Email: info.my@leviat.com**

### Netherlands

Slachthuisweg 10  
7556 AX Hengelo  
**Tel: +31 - 74 - 267 14 49**  
**Email: info.nl@leviat.com**

### New Zealand

246D James Fletcher Drive, Otahuhu,  
Auckland 2024  
**Tel: +64 - 9 276 2236**  
**Email: info.nz@leviat.com**

### Philippines

27F Office A, Podium West Tower,  
12 ADB Avenue, Ortigas Center  
Mandaluyong City, 1550  
**Tel: +63 - 2 7957 6381**  
**Email: info.ph@leviat.com**

### Poland

Ul. Obornicka 287  
60-691 Poznań  
**Tel: +48 - 61 - 622 14 14**  
**Email: info.pl@leviat.com**

### Singapore

10 Benoi Sector,  
Singapore 629845  
**Tel: +65 - 6266 6802**  
**Email: info.sg@leviat.com**

### Spain

Polígono Industrial Santa Ana  
c/ Ignacio Zuloaga, 20  
28522 Rivas-Vaciamadrid  
**Tel: +34 - 91 632 18 40**  
**Email: info.es@leviat.com**

### Sweden

Vädursgatan 5  
412 50 Göteborg  
**Tel: +46 - 31 - 98 58 00**  
**Email: info.se@leviat.com**

### Switzerland

Grenzstrasse 24  
3250 Lyss  
**Tel: +41 (0)800 22 66 00**  
**Email: info.ch@leviat.com**

### United Arab Emirates

RA08 TB02, PO Box 17225  
JAFZA, Jebel Ali, Dubai  
**Tel: +971 (0)4 883 4346**  
**Email: info.ae@leviat.com**

### United Kingdom

President Way,  
President Park,  
Sheffield S4 7UR  
**Tel: +44 - 114 275 5224**  
**Email: info.uk@leviat.com**

### USA / Canada

6467 S Falkenburg Road  
Riverview, FL 33578  
**Tel: (800) 423-9140**  
**Email: info.us@leviat.us**

For countries not listed  
**Email: info@leviat.com**

## Leviat.com

### Notes regarding this catalogue

© Protected by copyright. The construction applications and details provided in this publication are indicative only. In every case, project working details should be entrusted to appropriately qualified and experienced persons. Whilst every care has been exercised in the preparation of this publication to ensure that any advice, recommendations or information is accurate, no liability or responsibility of any kind is accepted by Leviat for inaccuracies or printing errors. Technical and design changes are reserved. With a policy of continuous product development, Leviat reserves the right to modify product design and specification at any time.

For more information on the following products, please contact:

**Masonry, Structural and  
Precast Concrete products:**

1300 304 320  
info.ancon.au@leviat.com  
Ancon.com.au

**Concrete Floor Jointing  
products:**

1800 335 215  
info.connolly.au@leviat.com  
Connollykeyjoint.com  
info.isedio.au@leviat.com  
Isedio.com.au

**Remedial Masonry  
products:**

1300 667 071  
info.helifix.au@leviat.com  
Helifix.com.au

**General Enquiries**

1300 304 320  
Leviat.com

**Sales Offices and Production**

**New South Wales, Sydney**

Unit A, 12 Heinrich Close,  
Eastern Creek | Sydney  
NSW 2766

**New South Wales, Casino**

10 Irving Drive  
Casino  
NSW 2470

**Victoria**

9/63-69 Pipe Road  
Laverton North | Melbourne  
VIC 3026

**Queensland**

17 Goodman Place  
Murarrie | Brisbane  
QLD 4172

**Western Australia**

18 Tennant Street  
Welshpool | Perth  
WA 6106

**South Australia**

Unit 2, 35-37 Maxwell Road  
Pooraka | Adelaide  
SA 5095

**Leviat.com**

---



# Leviat®