

The Leviat logo is displayed in white text on a dark blue background. The background of the entire page is a photograph of a construction site showing a concrete slab with a grid of stainless steel reinforcement bars (rebar) laid out on it. The rebar is arranged in a rectangular grid pattern, with some bars extending towards the viewer and others receding into the distance. The concrete surface is light-colored and textured. The rebar is dark and has a ribbed texture.

Leviat®

Australian Edition

Ancon®

**Stainless Steel
Reinforcement and
Round Bars**

December 2021

for the Construction Industry

Leviat

We imagine, model and make engineered products and innovative construction solutions that help turn architectural visions into reality and enable our construction partners to build better, safer, stronger and faster.

Leviat is a world leader in connecting, fixing, lifting and anchoring technology.


From the build of new schools, hospitals, homes and infrastructure, to the repair and maintenance of heritage structures, our engineering skills are making a difference around the world.

We provide technical design assistance at every stage of a project, from initial planning to installation and beyond.

Our technical support services range from simple product selection through to the development of a fully customised project-specific design solution.

Every promise we make locally, has the commitment and dedication of our global team behind it. We employ almost 3,000 people at 60 locations across North America, Europe and Asia-Pacific, providing an agile and responsive service worldwide.



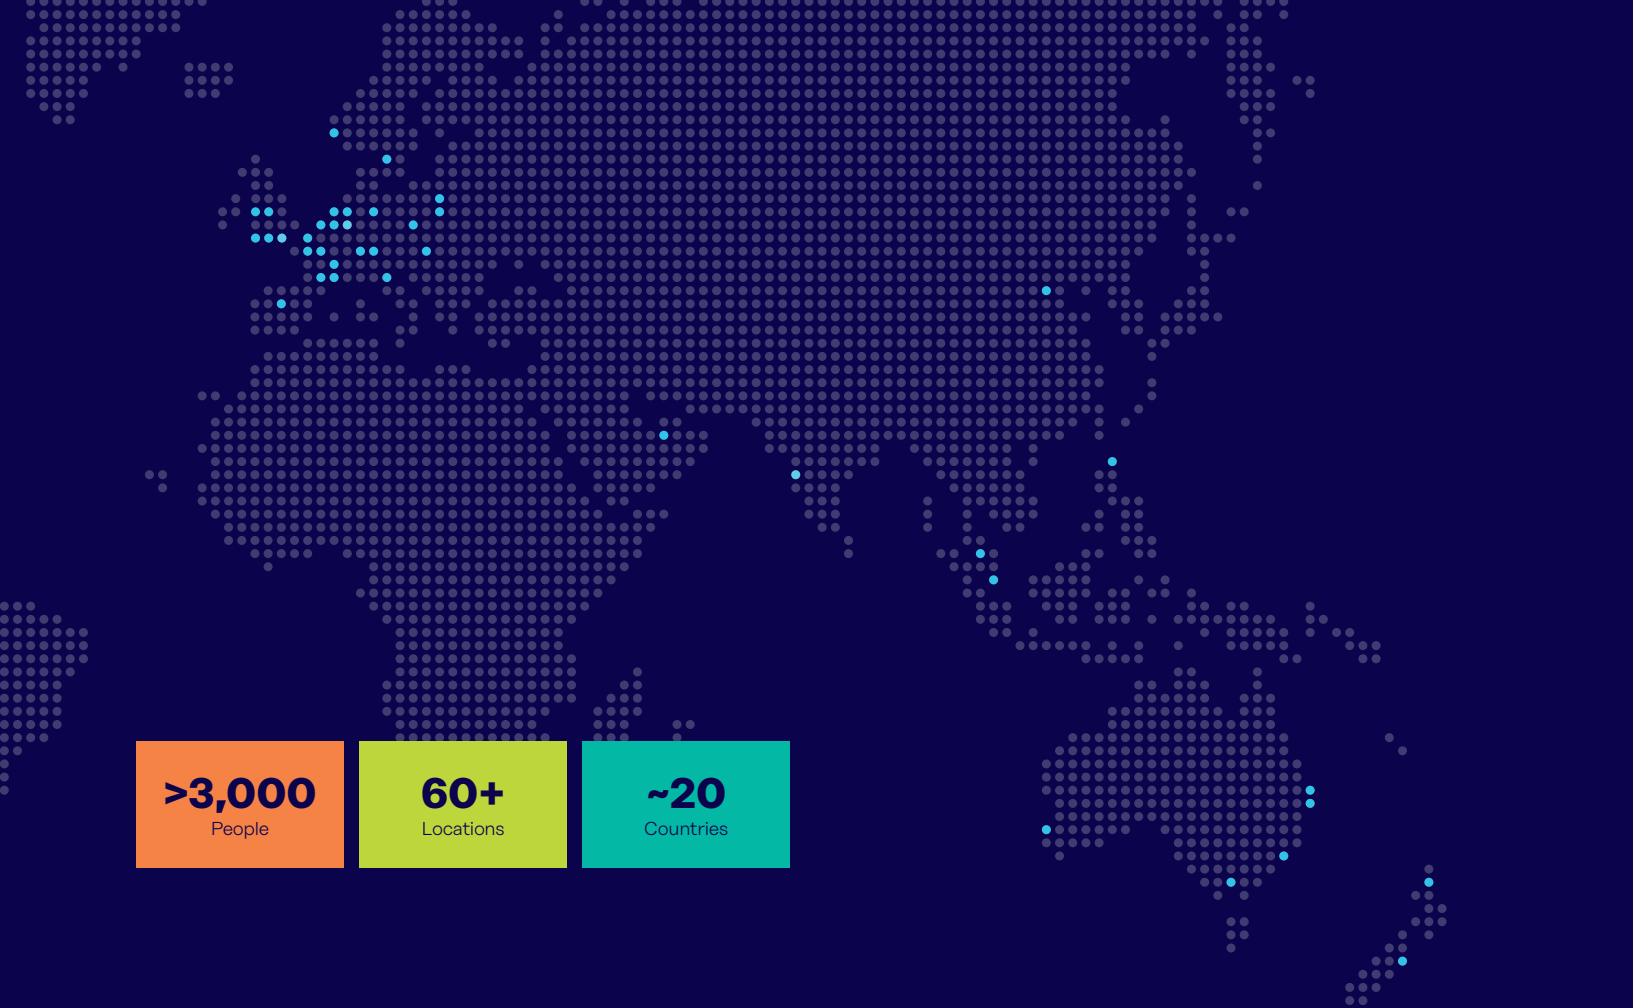

>3,000

People


60+

Locations

~20


Countries

Our areas of expertise:




Structural Connections

Systems to form robust, efficient connections, and continuity of concrete reinforcement as necessary, between walls, slabs, columns, beams and balconies, providing structural integrity as well as enhanced thermal and acoustic performance.



Lifting & Bracing

Systems for the safe and efficient transportation, lifting and temporary bracing of cast concrete elements and tilt-up panels before permanent structural connections are made.




Façade Support & Restraint

Systems for the safe and thermally-efficient fixing of the external building envelope, including brick and natural stone, insulated sandwich panels, curtain walling and suspended concrete façades, and also the repair and strengthening of existing masonry installations.




Anchoring & Fixing

Systems for fixing secondary fixtures to concrete, including anchor channels, bolts and inserts; also tension rod systems for roofs and canopies.



Formwork & Site Accessories

Non-structural accessories that complement our engineered solutions and help keep your construction environment operating safely and efficiently, including moulds for casting standard and special concrete elements and construction essentials such as reinforcing bar spacers.



Industrial Technology

Mounting channels, pipe clamps and other versatile framing systems that provide safe fixing in a wide range of industrial applications.

Leviat product ranges:

Ancon | Aschwanden | Connolly | Halfen | Helifix | Isedio | Meadow Burke | Modersohn | Moment | Plaka | Scaldex | Thermomass



Leviat®


Innovative engineered products and
construction solutions that allow
the industry to build safer,
stronger and faster.



Stainless Steel Reinforcement

A comprehensive range of stainless steel reinforcing bar is available from Leviat.

Stainless steel offers many advantages to the specifier and its use in the Construction Industry continues to increase. Stainless steel reinforcement ensures a high degree of corrosion resistance without requiring additional protection.

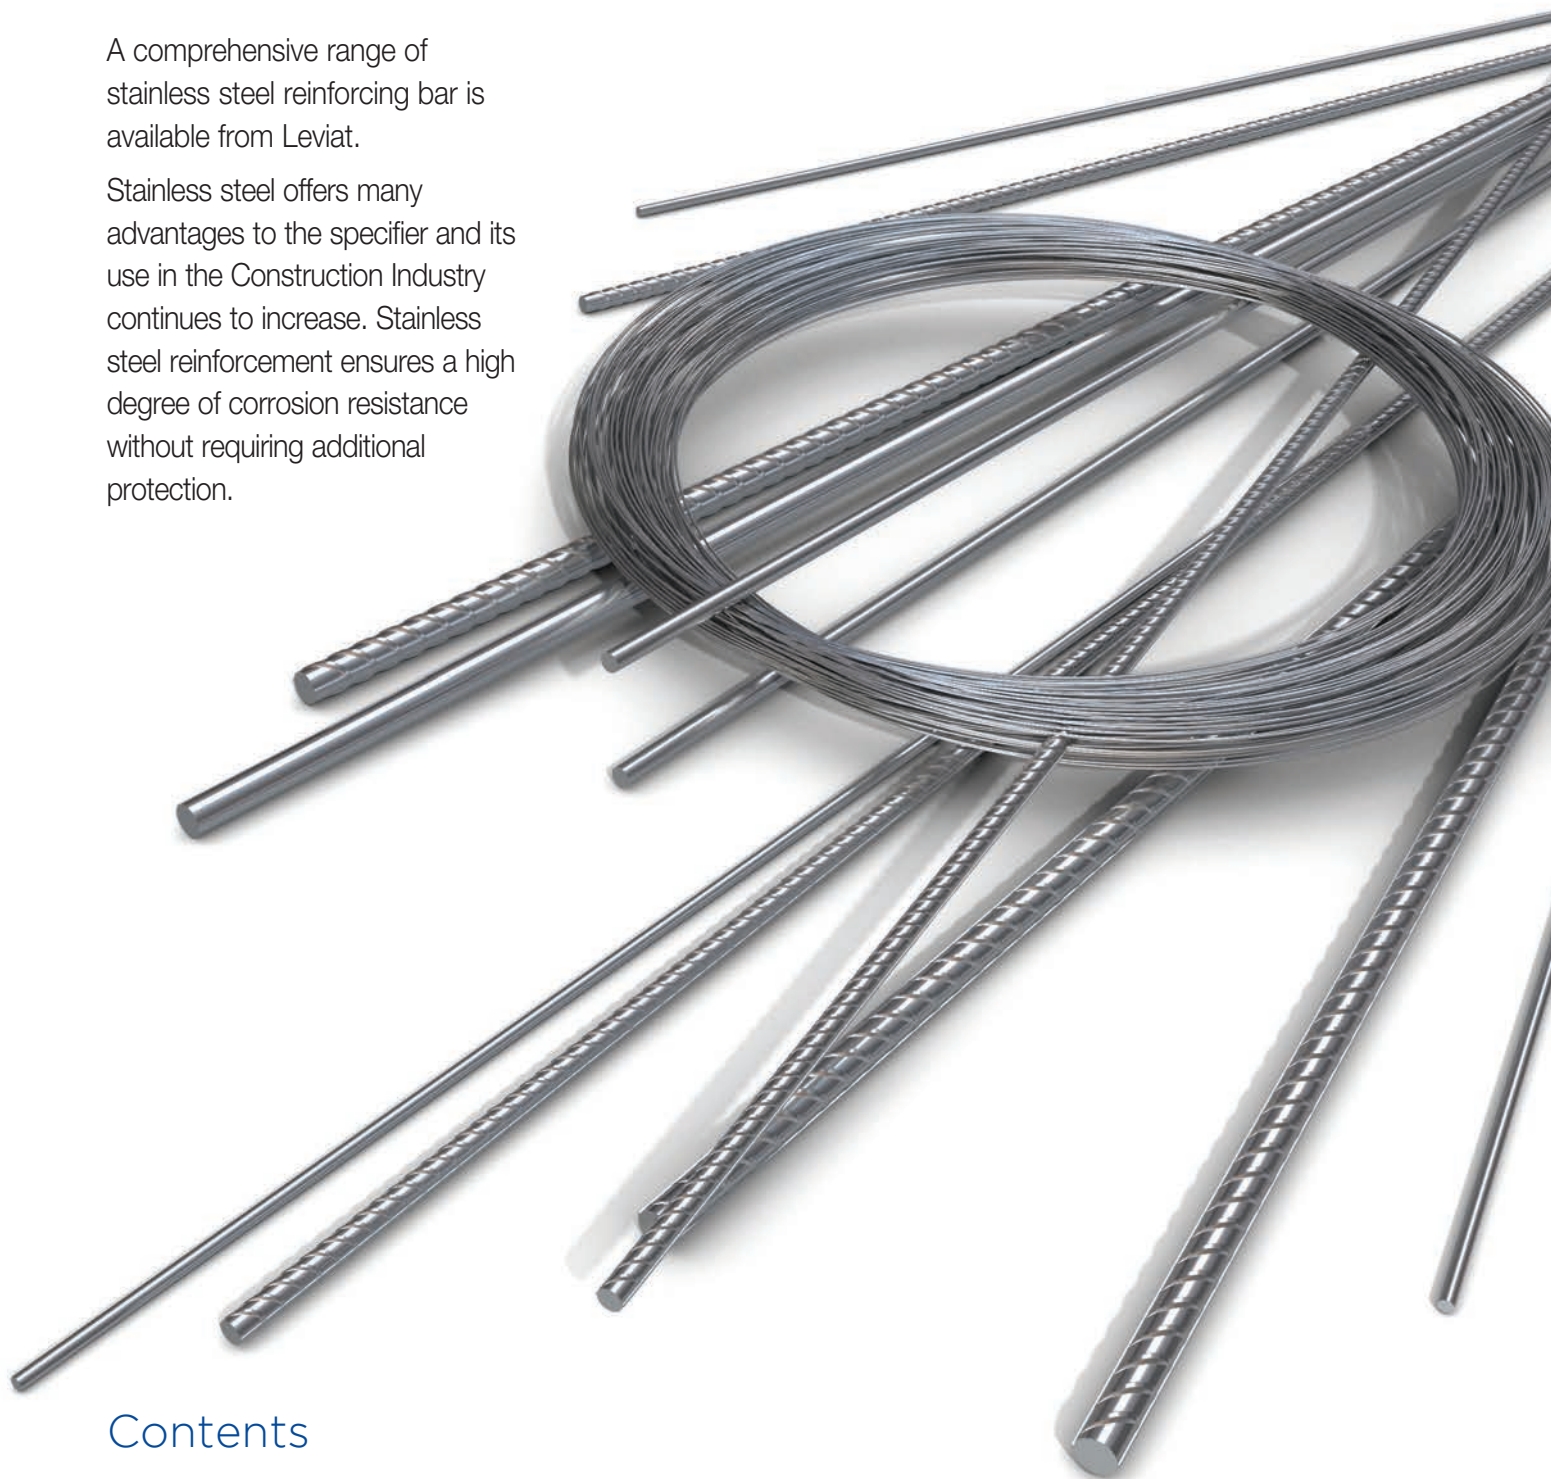

Contents

<u>Stainless Steel Reinforcement Range</u>	6
<u>Tying Wire</u>	6
<u>Bending and Threading</u>	6
<u>Physical Properties</u>	7-8
<u>BT Stainless Steel Couplers</u>	9
<u>Other Ancon Products</u>	9



Stainless Steel Reinforcement

Leviat offers a complete range of stainless steel reinforcement for the construction industry. These include both plain round bars (Ancon Staibar) and ribbed reinforcing bars (Ancon Stairib).

Plain Bar

Ancon Staibar 304/Ancon Staibar 316 -

An austenitic stainless steel reinforcing bar with a 0.2% proof stress of 205MPa and an ultimate tensile stress of 220MPa. It can be used for structural engineering purposes. It is particularly suited for highly corrosive environments such as in marine locations. It is best used in applications where high strength and corrosion resistance are required.

Ribbed Bar

Ancon Stairib 304 - An austenitic stainless steel reinforcing bar with a minimum 0.2% proof stress of 500MPa and an ultimate tensile stress of 550MPa. It can be used for both concrete reinforcement and structural engineering purposes.

Ancon Stairib 304 conforms to BS 6744:2016, Austenitic stainless steel bars for the reinforcement of concrete, for Grade 500 reinforcement.

Ancon Stairib 316 - An austenitic stainless steel reinforcing bar with a minimum 0.2% proof stress of 500MPa and an ultimate tensile stress of 550MPa. It can be used for both concrete reinforcement and structural engineering purposes. Ancon Stairib 316 is more corrosion resistant than Ancon Stairib 304 and is therefore more suitable for use in aggressive environments such as marine or heavy industrial locations.

Ancon Stairib 316 conforms to BS 6744:2016, Austenitic stainless steel bars for the reinforcement of concrete, for Grade 500 reinforcement.

Ancon Stairib 2304 (1.4362) - A duplex stainless steel reinforcing bar with a minimum 0.2% proof stress of 500MPa. As per the Australian Stainless Steel Development Association (ASSDA), Ancon Stairib 2304 stainless steel provides similar corrosion resistance properties to Grade 316 stainless steel. It is best used in applications requiring a combination of high strength and corrosion resistance or where maintenance or inspection is impractical.

All bar grades are hot rolled and cold or warm worked to provide the stated mechanical properties. Chemical composition is given in the table below.

Ancon Stairib 2205 (1.4462) - It is a duplex stainless steel reinforcing bar with minimum 0.2% proof stress of 500MPa. It provides even better corrosion resistance than grade 316 stainless steel and can be used as reinforcing bars for structural applications such as bridges, roads, harbours and buildings.

Bending and Threading

Bars are available supplied cut to length, bent to schedule, threaded and engineered as specified, please contact the our Technical Department for maximum bar lengths.

Tying Wire

Tying wire 1.27mm in diameter is available in grade 2304 (1.4362) stainless steel.

Chemical Composition (% by mass)

BS-EN 10088-1 Steel Designation Number	Ancon Staibar 304 / Ancon Stairib 304 1.4301		Ancon Staibar 316 / Ancon Stairib 316 1.4436		Ancon Stairib 2304 1.4362		Ancon Stairib 2205 1.4462	
	Min	Max	Min	Max	Min	Max	Min	Max
Carbon	-	0.07	-	0.05	-	0.03	-	0.03
Silicon	-	1.0	-	1.0	-	1.0	-	1.0
Manganese	-	2.0	-	2.0	-	2.0	-	2.0
Nickel	8.0	10.5	10.5	13.0	3.5	5.5	4.5	6.5
Chromium	17.5	19.5	16.5	18.5	22.0	24.0	21.0	23.0
Molybdenum	-	-	2.5	3.0	0.10	0.60	2.5	3.5
Sulphur	-	0.030	-	0.030	-	0.015	-	0.015
Phosphorous	-	0.045	-	0.045	-	0.035	-	0.035
Nitrogen	-	0.11	-	0.11	0.05	0.20	0.10	0.22

Nominal Cross-sectional area and Nominal Mass per metre length as per AS/NZS 4671:2019

Nominal diameter mm	Cross-sectional area mm ²	Mass per metre length kg/m	Strength grade and ductility class
10	78.5	0.62	500N
12	113	0.89	
16	201	1.58	
20	314	2.47	
24	452	3.55	
28	616	4.83	
32	804	6.31	
36	1020	7.99	
40	1260	9.86	
50	1960	15.4	

Notes: The values for the mass per unit length have been calculated from the values for the nominal diameter using a density value of 7850 kg/m³. The equivalent diameter is the same as the nominal diameter for all the bars listed above.



Physical Properties

Extended Temperature Performance

Stainless Steels are high temperature alloys and Leviat's complete stainless steel range have excellent mechanical performance at elevated temperature. Stainless steels do not undergo the ductile to brittle condition change of conventional carbon steel as temperature falls.

Stainless steel bars are therefore suitable for use in cryogenic and high temperature applications.

Low Magnetic Permeability

Austenitic grade bars Ancon Stalbar 304/316 and Ancon Stairib 304/316 have extremely low magnetic permeability characteristics and are virtually non-magnetic.

This property can be very helpful to the designer of structures housing equipment such as electric arc furnaces, magnetic resonance imaging (MRI) units or other sensitive electronic equipment where a neutral magnetic environment is a requirement.



Stainless Steel Reinforcement



Strength and ductility properties as per BS 6744:2016

	Ancon Staibar 304	Ancon Staibar 316	Ancon Stairib 304	Ancon Stairib 316	Ancon Stairib 2304	Ancon Stairib 2205
0.2% Proof Stress	205 min.	205 min.	500 min.	500 min.	500 min.	500 min.
Minimum value of stress ratio	≥ 1.08	≥ 1.08	≥ 1.08	≥ 1.08	≥ 1.08	≥ 1.08
Percentage total elongation at maximum force, A_{gt}	≥ 5.0	≥ 5.0	≥ 5.0	≥ 5.0	≥ 5.0	≥ 5.0
Percentage elongation after fracture, A_5	$\geq 14\%$	$\geq 14\%$	$\geq 14\%$	$\geq 14\%$	$\geq 14\%$	$\geq 14\%$



Ancon BT Stainless Steel Couplers

The BT system is one of the smallest and the most cost-effective coupler systems in our range, when used on large scale, high coupler volume projects. Stainless steel Ancon BT couplers are available in 12, 16, 20, 25, 28, 32, 36, 40, and 50mm bar diameters.

The end of each bar to be joined is cut square and enlarged by cold forging. This increases the core diameter of the bar to ensure that the joint is stronger than the bar.

Parallel metric threads are cut onto the enlarged ends. The threaded end can be proof tested to a force equal to the characteristic yield strength of the bar. A nominal allowance of +50mm per threaded bar end should be made for cutting square and cold forging.

The threaded ends of the bars are protected by an external plastic sheath. Couplers, which are usually supplied attached to the bar, have their internal threads protected by an internal plastic end cap. For certain applications, especially where the Ancon BT system is being used in deep pours, the coupler end caps may not prevent the ingress of concrete fines. For these applications, further protection may be required.

For further information please contact Leviat.



Other Products

Reinforcement Continuity Systems

Reinforcement Continuity Systems are an increasingly popular means of maintaining continuity of reinforcement at construction joints in concrete. The Ancon Keybox system eliminates the need to drill shuttering and can simplify formwork design, thereby accelerating the construction process. It is available in both standard units and special configurations. Ancon KSN Anchors eliminate the need for on-site bar straightening and are available as standard in 12mm, 16mm and 20mm diameters. The system is also available with a re-useable rebate former.

Shear Load Connectors

Ancon DSD and ESD Shear Load Connectors are used to transfer shear across expansion and contraction joints in concrete. They are more effective at transferring load and allowing movement to take place than standard dowels, and can be used to eliminate double columns at structural movement joints in buildings. A 'Lockable' dowel is also available for temporary movement joints in post-tensioned concrete frames.

Punching Shear Reinforcement

Ancon Shearfix is used within a slab to provide additional reinforcement from punching shear around columns. The system consists of double-headed steel studs welded to flat rails and is designed to suit the load conditions and slab depth at each column using our free calculation software.

Masonry Support Systems

Masonry cladding on concrete or steel frames is normally supported from stainless steel support systems. Ancon MDC Systems create a continuous angle to support the outer leaf of masonry. Ancon Individual Brackets support masonry features such as curves and arches.

Special Fabrications

Leviat is an ASSDA accredited specialist fabricator and has a wealth of experience in working with a variety of material grades. High integrity steel components are supplied to a wide range of industries including Civil Engineering, Building, Infrastructure, Water Treatment, Nuclear and Mining.



Design
Program
Available

Design
Program
Available

© Thiess, Energy Australia

Contact Leviat worldwide

Australia

Unit A, 1 Heinrich Close,
Eastern Creek, Sydney, NSW 2766
Tel: +61 - 2 8808 3100
Email: info.au@leviat.com

Austria

Leonard-Bernstein-Str. 10
Saturn Tower, 1220 Wien
Tel: +43 - 1 - 259 6770
Email: info.at@leviat.com

Belgium

Industrielaan 2
1740 Ternat
Tel: +32 - 2 - 582 29 45
Email: info.be@leviat.com

China

Room 601 Tower D,
Vantone Centre
No. A6 Chao Yang Men Wai Street
Chaoyang District
Beijing P.R. China 100020
Tel: +86 - 10 5907 3200
Email: info.cn@leviat.com

Czech Republic

Pekařská 695/10a
155 00 Praha 5
Tel: +420 - 311 - 690 060
Email: info.cz@leviat.com

Finland

Vädursgatan 5
412 50 Göteborg / Sweden
Tel: +358 (0)10 6338781
Email: info.fi@leviat.com

France

6, Rue de Cabanis
31240 L'Union
Tel: +33 (0)5 34 25 54 82
Email: info.fr@leviat.com

Germany

Liebigstrasse 14
40764 Langenfeld
Tel: +49 - 2173 - 970 - 0
Email: info.de@leviat.com

India

Unit S4, 902, A Wing,
Lodha iThink Techno Campus Building,
Panchpakhadi, Pokharan Road 2,
Thane, 400606
Tel: +91-022 695 33700
Email: info.in@leviat.com

Italy

Via F.lli Bronzetti 28
24124 Bergamo
Tel: +39 - 035 - 0760711
Email: info.it@leviat.com

Malaysia

28 Jalan Anggerik Mokara 31/59
Kota Kemuning,
40460 Shah Alam Selangor
Tel: +603 - 5122 4182
Email: info.my@leviat.com

Netherlands

Oostermaat 3
7623 CS Borne
Tel: +31 - 74 - 267 14 49
Email: info.nl@leviat.com

New Zealand

246D James Fletcher Drive, Otahuhu,
Auckland 2024
Tel: +64 - 9 276 2236
Email: info.nz@leviat.com

Philippines

27F Office A, Podium West Tower,
12 ADB Avenue, Ortigas Center
Mandaluyong City, 1550
Tel: +63 - 2 7957 6381
Email: info.ph@leviat.com

Poland

Ul. Obornicka 287
60-691 Poznań
Tel: +48 - 61 - 622 14 14
Email: info.pl@leviat.com

Singapore

10 Benoi Sector,
Singapore 629845
Tel: +65 - 6266 6802
Email: info.sg@leviat.com

Spain

Polígono Industrial Santa Ana
c/ Ignacio Zuloaga, 20
28522 Rivas-Vaciamadrid
Tel: +34 - 91 632 18 40
Email: info.es@leviat.com

Sweden

Vädursgatan 5
412 50 Göteborg
Tel: +46 - 31 - 98 58 00
Email: info.se@leviat.com

Switzerland

Grenzstrasse 24
3250 Lyss
Tel: +41 (0)800 22 66 00
Email: info.ch@leviat.com

United Arab Emirates

RA08 TB02, PO Box 17225
JAFZA, Jebel Ali, Dubai
Tel: +971 (0)4 883 4346
Email: info.ae@leviat.com

United Kingdom

President Way,
President Park,
Sheffield S4 7UR
Tel: +44 - 114 275 5224
Email: info.uk@leviat.com

USA / Canada

6467 S Falkenburg Road
Riverview, FL 33578
Tel: (800) 423-9140
Email: info.us@leviat.us

For countries not listed
Email: info@leviat.com

Notes regarding this document

© Protected by copyright. The information in this publication is based on state-of-the-art technology at the time of publication. In every case, project working details should be entrusted to appropriately qualified and experienced persons. Leviat shall not accept liability for the accuracy of the information in this document or for any printing errors. We reserve the right to make technical and design changes at any time. With a policy of continuous product development, Leviat reserves the right to modify product design and specification at any time.

For more information on the following products, please contact:

**Masonry, Structural and
Precast Concrete products:**

1300 304 320
info.ancon.au@leviat.com
Ancon.com.au

**Concrete Floor Jointing
products:**

1800 335 215
info.connolly.au@leviat.com
Connolly.com.au
info.isedio.au@leviat.com
Isedio.com.au

**Remedial Masonry
products:**

1300 667 071
info.helifix.au@leviat.com
Helifix.com.au

General Enquiries

1300 304 320
Leviat.com

Sales Offices and Production

New South Wales, Sydney

Unit A, 1 Heinrich Close,
Eastern Creek | Sydney
NSW 2770

New South Wales, Casino

10 Irving Drive
Casino
NSW 2470

Victoria

9/63-69 Pipe Road
Laverton North | Melbourne
VIC 3026

Queensland

4/15 Terrace Place
Murarrie | Brisbane QLD 4172

South Australia

Unit 2/35-37 Maxwell Road
Laverton North | Adelaide
SA 5095

Western Australia

18 Tennant Street,
Welshpool | Perth
WA 6106

Leviat.com

Leviat®

Imagine. Model. Make.

Leviat.com