



Lifting Clutches

Leviat's range of lifting clutches comprises the Ancon UniLift Locking Klaw and the Halfen DEHA Universal Lifting Clutch.

Together, they provide the ideal lifting and handling system for a wide variety of precast concrete products, particularly in civil engineering applications, and are recognised for their superior safety features which protect against unwanted disconnection.




Lifting Clutch



The Ultimate Lifting Clutch Range

The Leviat range comprises the Ancon UniLift Locking Klaw (LK) and the Halfen DEHA Universal Lifting Clutch (LC). The Ancon UniLift Locking Klaw is suitable for all working load limits up to 32t. The Halfen DEHA Universal Lifting Clutch is available with a Working Load Limit of 32t. These strong, safe, lightweight clutches are compatible with all spherical head lifting anchors from Leviat. Please contact us regarding compatibility with other lifting systems.

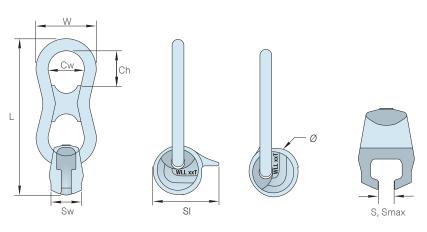


Part Codes and Nominal Dimensions

Ch			Dimensions (mm)						
OII	Cw	Sw	SI	Ø	S	Smax			
44	40	33	72	56	11	13			
59	52	42	88	68	16	18			
62	70	57	113	88	22	25			
83	90	73	144	112	31	32			
201	76	110	195	152	43	46			
189	172	160	300	180	52	58			
291	166	155	233	182	55	58			
	59 62 83 201 189	59 52 62 70 83 90 201 76 189 172	59 52 42 62 70 57 83 90 73 201 76 110 189 172 160	59 52 42 88 62 70 57 113 83 90 73 144 201 76 110 195 189 172 160 300	59 52 42 88 68 62 70 57 113 88 83 90 73 144 112 201 76 110 195 152 189 172 160 300 180	59 52 42 88 68 16 62 70 57 113 88 22 83 90 73 144 112 31 201 76 110 195 152 43 189 172 160 300 180 52			

^{*}Halfen clutches carry a CE mark, more information is available on request.

Working Load Limits

Part Code	Annual Proof Load kN	Nominal WLL Anchor
01LK	24	1.3
02LK	36	2.5
05LK	60	5
10LK	120	10
20LK	240	20
32LC	384	32
32LK	384	32

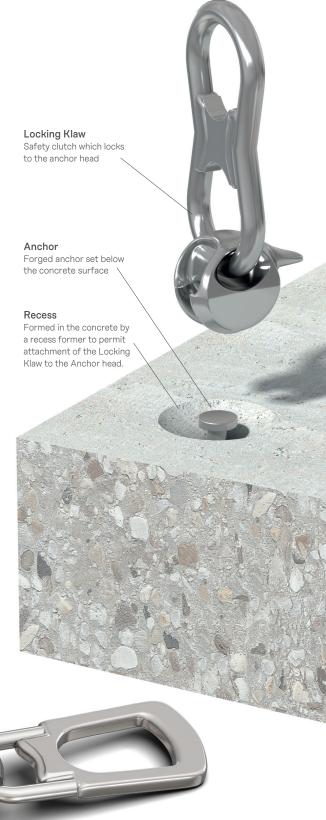

Leviat June 2022

98 Kurrajong Avenue, Mount Druitt, Sydney, NSW 2770 1300 304 320 info.au@leviat.com

New South Wales | Victoria | Queensland | Western Australia